


Product Description

DKD Instrument's modular broadband RF block amplifiers are designed to be a low cost, high performance solutions to new designs or production replacements. The AMP-05 amplifier can operate from a 10 volt power source and cover a frequency range from .001 - 6.0 Ghz.

All modular series components are prepackaged in a RF sealed enclosure with SMA(F) connectors for both input and output. Power is supplied to the module through a EMI filtered feed-through.

Features

- **Broadband .001 - 6.0 Ghz**
- **Low Noise 5dB@ 1GHz**
- **Single Supply (+10v)**
- **DC Isolated**
- **Small Enclosure**
- **SMA(F) Connectors IN/OUT**

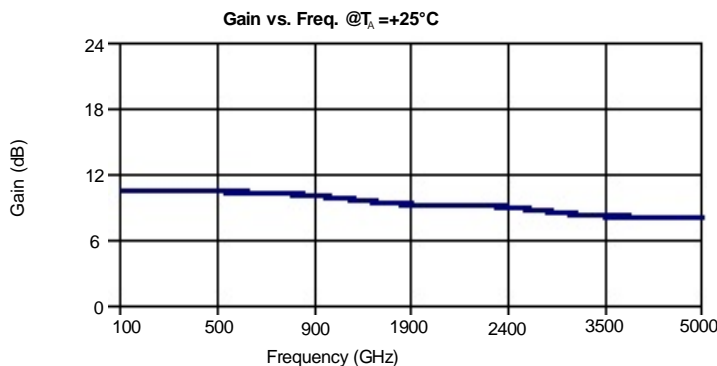

Electrical Specifications , 10V @45ma

T_A = +25j C

Parameter	V _{CC} = +10v			Units
	Min	Typ	Max	
Frequency Range		.001 to 6.0		Ghz
Gain @ 1.0 GHz	10	10.5		dB
Gain Variation Over Temperature				dB/Tc
Input Return Loss @ 1.0 GHz		15		dB
Output Return Loss @ 1.0GHz		14		dB
Reverse Isolation		16		dB
Output Power for 1dB Compression (P1dB) @ 1.0 GHz		14		dBm
Output Third Order Intercept (Psat) @ 1.0 GHz		28		dBm
Noise Figure @ 1GHz		5.0		dB
Maximum Input Power		13		dBm
Supply Current (Icc)		45		mA